


**The Indoor Motion Sensor** alarms when motion is sensed or when the external contact is opened. It is battery powered and requires no installation tools. A Pyroflex™ sensor with HighBar™ signal processing allows for industry-leading pet immunity and catch performance.

### Features


- Industry-leading pet immunity and catch performance
- Supports both motion zone and an external contact zone
- Mountable on walls or in corners
- 5 year warranty



**Enroll** by placing the panel into wireless enrollment mode and then sending a sensing event (e.g. tamper, motion, or external contact trip).

### Enrollment Tips

- Power down the sensor after enrollment because the panel may mistakenly **double enroll** the sensor if it is tripped again while you are walking over to enroll the next sensor.
- Use loop 3 for the external contact. Loop 2 will NOT work.



### Motion Enrollment Panel Questions

- Select RF sensor # (01 to 48)      *Select a zone number*
- Select RF sensor type                *[04] Interior Follower*
- Select RF sensor equip type        *[2] Motion*
- Select RF sensor equip code        *[0000] Other or [0869] PIR w/Pet Immunity*
- Select RF sensor other equip code\* *[0] Other*
- Select RF sensor serial number     *Press Shift, Press Learn, Trip sensor*
- Select RF sensor age                 *[1] New*
- Select RF sensor loop number      *[1] Motion*

### External Contact Enrollment Panel Questions


- Select RF sensor # (01 to 48)      *Select a zone number*
- Select RF sensor type                *[03] Perimeter*
- Select RF sensor equip code        *[0000] Other or [0862] Thin door window*
- Select RF sensor other equip code\* *[0] Other*
- Select RF sensor serial number     *Press Shift, Press Learn, Trip sensor*
- Select RF sensor age                 *[1] New*
- Select RF sensor loop number      *[3] Additional Input*

\* Option not present in GC3 panel

Verify proper enrollment and operation using your control panel's installation manual.

**Install** using the included 3M VHB® tape to adhere the motion sensor on a wall or in a corner. The tape should be applied to the **back** when wall mounting or to the **back bevels** when corner mounting. Alternatively, screw mounting can be done by punching out the screw mounting holes.

Mounting Screw Holes



### Installation Tips

- Mount 7.5 to 9.5 feet from the floor for an optimal balance between catch performance and pet immunity.
- Remove the cover and circuit board before trying to punch out the screw mounting holes.
- Ensure the bug foam stays intact and snug around the circuit board.

### External Contact (not evaluated by ETL)

- Use a **normally-closed** contact because the motion sensor will transmit an alarm when it sees the external contact **open**.
- Do not use end-of-line resistors.

## Pro Tips

**Walk test mode** is entered by pressing the motion sensor's tamper button. The walk test lasts three minutes.


### Walk Test Operation

- The walk test LED turns on when motion is sensed.
- The motion sensor performs a re-calibration after each activation. The re-calibration takes about 30 seconds. The sensor will NOT sense motion during the re-calibration.
- Wireless transmissions are sent for each detection, so walk test mode can also be used to test the panel.

**3M VHB tape** works great if the surface is properly prepared and firm pressure is applied for over 10 seconds.

### Surface Preparation

- Clean the surface
- Ensure the mounting surface temperature is above 50 °F

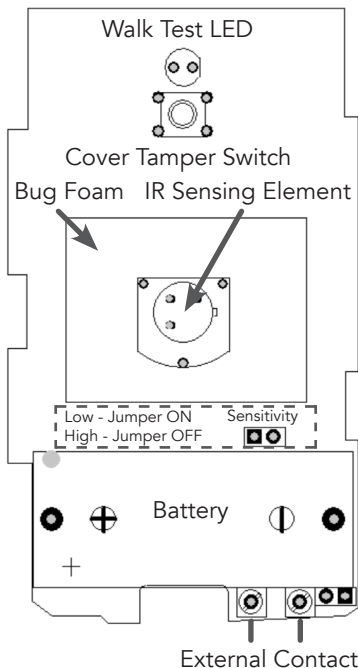


**Motion lockout** is active for three minutes after a motion event is detected. During the motion lockout period, motion events will be ignored.

**Motion sensitivity** can be adjusted by the sensitivity jumper on the circuit board.

- Jumper Installed (lower sensitivity): Detects person in 3 to 5 steps. Increases pet immunity. Usually for security applications.
- Jumper NOT Installed (higher sensitivity): Detects person in 2 to 4 steps. Usually for occupancy applications.

## Pro Tips

**Pet immunity** is optimized when the motion sensor is mounted at 7.5 to 9.5 feet high and aimed **away** from house features that could allow pets to be high in the detection field (e.g. stairs, counter tops, tall furniture).

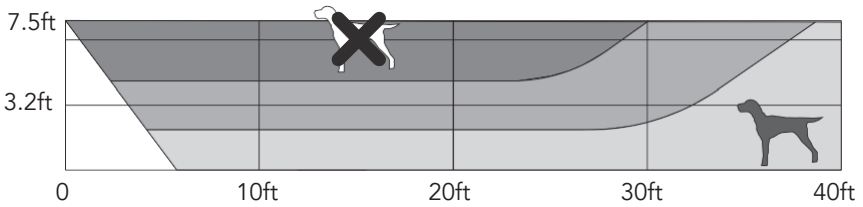

**Motion catch performance** is best when the motion sensor is positioned so a person would typically walk across the front of the motion sensor instead of directly toward the motion sensor.

### Motion Detection Tips

- Provide a clear line-of-sight to the monitored area and remember that glass blocks infrared energy.
- Aim away from windows and sunlight.
- Aim away from air conditioners, heaters or heating/cooling vents.


## Accessories

**Gimbal mount** (RE019 and RE019-10) allows the motion sensor direction to be adjusted **after** mounting on a wall.


**Horizontal beam lens** (RE020) has less **look-down** which results in increased pet immunity.

## Specifications


### Side field of view for a mounting height of 7.5 feet

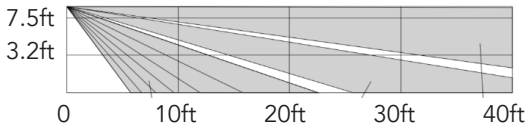

### Side field of view for a mounting height of 9.5 feet

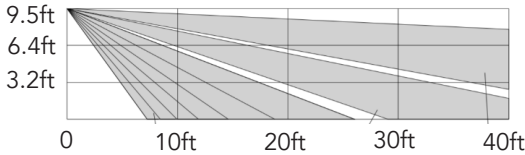

### Top field of view

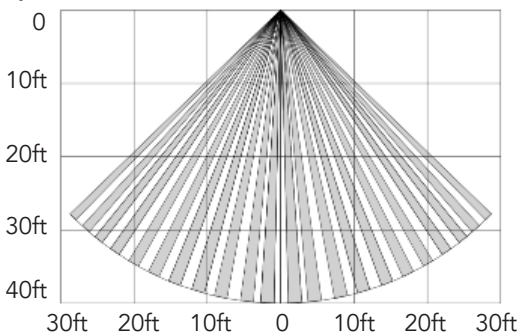

## Specifications

Physical	
Housing Dimensions	3.50 x 2.40 x 1.70 inches (8.9 x 6.1 x 4.3 cm)
Weight with Battery	3.2 ounces (91 grams)
Mounting Fastener	3M VHB (Very High Bond) Tape or Screws (both provided)
Environmental	
Operating Temperature	32 to 120 °F (0 to 49 °C)
Maximum Humidity	85% non-condensing relative humidity
Sensor Specifications	
Frequency	345 MHz
Pet Immunity	Two 60-pound dogs or one 85-pound dog
Replacement Battery	One Panasonic CR132A
Nominal Battery Life	6 to 8 years
Battery Voltage	3.0 VDC (Nominal), 2.2 VDC (Low)
Current Draw	30 mA (Maximum), 20 uA (Quiescent)
Optimal Mounting Height	7.5 to 9.5 feet (2.3 to 3.0 m)
Transmitted Indications	Cover Tamper, Low Battery, Supervision
Certification	
RE210T	UL639, ULC-S309-03, ETL, FCC, IC

*Specifications subject to change without notice.*

### WARRANTY

Alula will replace all non-portable products that are defective in their first five (5) years.

### IC NOTICE

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux cnr d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage, et
- (2) L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE210

### FCC NOTICE

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by Alula could void the user's authority to operate this equipment.

FCC ID: U5X-RE210

### TRADEMARKS

Alula is a trademark owned by Alula Holdings, LLC.

"2GIG" is a trademark owned by Nortek Security & Control, LLC.

Alula products will function with 2GIG systems. However, no Alula product is produced by, endorsed by, or is officially associated with 2GIG.

Alula recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

47-0005-05 • RevC • 2018-03-27

Tech Support Line • (888) 88-ALULA • (888) 882-5852

[alula.net](http://alula.net)