


NanoMax is the smallest full-featured security transmitter in the industry. It is typically used to sense opening and closings of doors and windows, but can secure just about anything using its Strip & Stick external contact holes. It will alarm when the magnet is pulled away from the NanoMax or when the external contact is opened.




Features

- Quick peel and press mounting
- Small profile for a near invisible look
- Most flexible magnet positioning in the industry
- Strip & Stick external contact holes
- 5 year warranty

Enroll by placing the panel into wireless enrollment mode and removing the battery tab or tripping the sensor three times.

Enrollment Tips


- Program as an **RF** type (Supervised RF)
- Loop 2 = Door
- Loop 4 = Tamper
- Removing the battery tab, which can be done without removing the cover, sends the entire enrollment sequence needed by Honeywell panels.
- Sensor trips should be spaced by two seconds when enrolling.



Install by removing the adhesive paper and adhering the NanoMax and magnet on a door or window. Make sure to align the alignment marks on the NanoMax and magnet when mounting. Alternatively, NanoMax can be used with an external contact instead of using the reed switch.

External Contact

- If you are using the external contact then you cannot use the reed switch.
- Use a **normally-closed** contact because NanoMax will transmit an alarm when it sees the external contact **open**.
- Do not use end-of-line resistors.
- Connect the contact to NanoMax by inserting the contact's wires into the two Strip & Stick holes on the back of NanoMax.
- Additional wiring information can be found by searching alula.net for "external contact wiring".




Pro Tips

3M™ VHB™ Tape works great if the surface is properly prepared and firm pressure is applied for over 10 seconds.


Surface Preparation

- Clean the surface
- Ensure the mounting surface temperature is above 50 °F


Wireless performance is optimized when mounted near the top of the door in a vertical orientation.

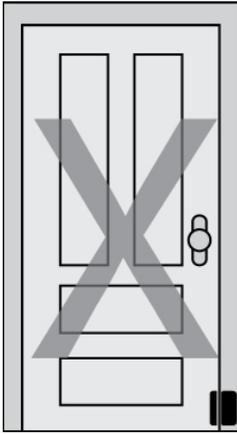

WRONG

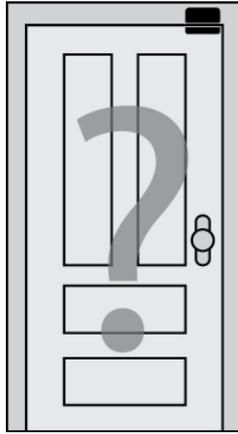

OK

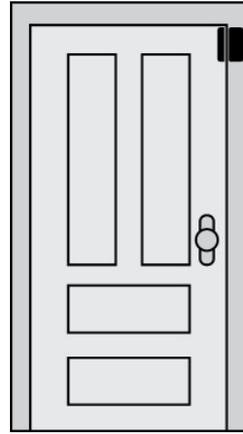


BEST

Accessories




MetalMax NanoMax Mounts (RE033-16) can be used for better performance on metal and narrow mounting situations.

- Improves wireless performance by moving the internal antenna away from metal surfaces.
- Provides an alternate mounting orientation for narrow installs.
- Increases magnet gap distance on metal surfaces.

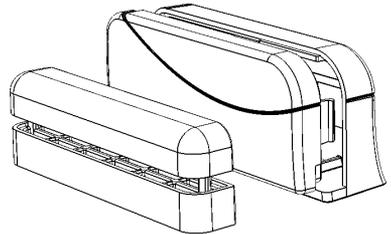

Magnet Gap Specifications

| Non-Ferromagnetic Surface | |
|---|----------------------|
| Nominal Mounting Distance | 0.75 inches (2.0 cm) |
| X Axis - Make | 0.90 inches (2.3 cm) |
| Break | 0.95 inches (2.5 cm) |
| Y Axis - Make | 1.70 inches (4.3 cm) |
| Break | 1.75 inches (4.5 cm) |
| Z Axis - Make | 1.10 inches (2.8 cm) |
| Break | 1.15 inches (3.0 cm) |
| Ferromagnetic Surface (Using RE033 Mount) | |
| Nominal Mounting Distance | 0.50 inches (1.2 cm) |
| X Axis - Make | 0.55 inches (1.4 cm) |
| Break | 0.60 inches (1.5 cm) |
| Y Axis - Make | 1.50 inches (3.8 cm) |
| Break | 1.55 inches (4.0 cm) |
| Z Axis - Make | 0.70 inches (1.8 cm) |
| Break | 0.75 inches (2.0 cm) |



Specifications

| Physical | |
|--|--|
| Housing Dimensions | 1.80 x 0.77 x 0.39 inches (4.6 x 2.0 x 1.0 cm) |
| Weight with Battery | 0.53 ounces (15 grams) |
| Mounting Fastener | 3M™ VHB™ Tape |
| Environmental | |
| Operating Temperature | 32 to 120 °F (0 to 49 °C) |
| Maximum Humidity | 85% non-condensing relative humidity |
| Sensor Specifications | |
| Frequency | 345 MHz |
| Replacement Battery | One Panasonic® CR1632 |
| Nominal Battery Life | 6 years |
| Battery Voltage | 3.0 VDC (Nominal), 2.62 VDC (Low) |
| Current Draw | 20 mA (Maximum), 0.5 uA (Quiescent) |
| Transmitted Indications | Cover Tamper, Low Battery, Supervision |
| Maximum Wire Length for External Contact | 7.5 feet |
| Certifications | |
| RE222T | FCC, IC |

Specification subject to change without notice

WARRANTY

Alula will replace non-portable products that are defective in their first five (5) years, and portable products that are defective in their first two (2) years.

IC NOTICE

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux cnr d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage, et
- (2) L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE222T

FCC NOTICE

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by Alula could void the user's authority to operate this equipment.

FCC ID: U5X-RE222T

TRADEMARKS

Alula is a trademark owned by Alula Holdings, LLC.

"2GIG" is a trademark owned by Nortek Security and Controls, LLC. Alula products will function with 2GIG systems. However, no Alula product is produced by, endorsed by, or is officially associated with 2GIG. Alula recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

Panasonic is a registered trademark owned by Panasonic Corporation.

3M and VHB are trademarks owned by 3M Company.

47-0006-05 • RevB • 2019-02-20

Tech Support Line • (888) 88-ALULA • (888)-882-5852

alula.net